

Safety Glasses



- Sports style safety glasses with polycarbonate lens, grip pads and adjustable arms.
- Durable and Lightweight frame makes it ideal to wear for longer periods for comfort and fit.
- Comfortable silicone nose piece
- Soft, rubber tip arms for added comfort
- Adjustable arm height
- Adjustable arm length
- AS/NZS1337.1:2010 Standard
- Available in Clear and Silver Mirrored lens which is great for outdoors as it provides high sun glare protection.
- Include Wipe Cloth, Cord and Pouch



CODE	Lens	Weight kg	Std Pack
AG-P9005RR	Clear	35	1
AG-P9005RR-1	Silver Mirror	35	1

FATOOLS®

Safety Glasses

- Medium impact safety glasses with polycarbonate lens.
- Durable and Lightweight frame makes it ideal to wear for longer periods for comfort and fit.
- Adjustable arm height
- Adjustable arm length
- AS/NZS1337.1:2010 Standard
- Include Cord and Pouch




CODE	Lens	Weight gr	Std Pack
AG-P705	Clear	36	1

FATOOLS®

Safety Glasses

- Great safety glasses for men and women.
- Soft rubber on both legs.
- Comfortable light weight fit.
- Provides excellent side and front impact protection while still being comfortable to wear.
- Meets ANSI Z87.1-2003 high velocity requirements along with being CE certified and complies with EN-166 requirements
- Available in Clear, Smoke and Amber lens which is great for outdoors as it provides high sun glare protection

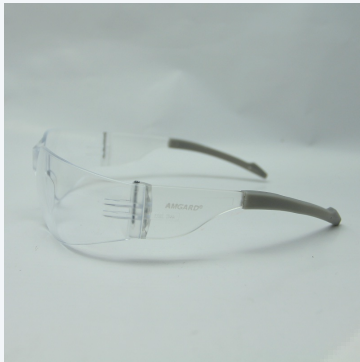

CODE	Lens	Weight kg	Std Pack
AG-355	Clear	32	1
AG-355GR	Smoke	32	1
AG-355Y	Amber	32	1

FATTOOLS®

Safety Glasses

- Great safety glasses for men and women.
- Soft rubber on both legs.
- Comfortable light weight fit.
- Wraparound lens, Semi Rimless Eye Protection.
- Meets ANSI Z87.1-2003 high velocity requirements along with being CE certified and complies with EN-166 requirements
- Available in Clear, Smoke and Amber lens which is great for outdoors as it provides high sun glare protection.



CODE	Lens	Weight kg	Std Pack
AG-C360	Clear	32	1
AG-C360GR	Smoke	32	1
AG-C360Y	Amber	32	1

FATTOOLS®

Safety Glasses

- Great safety glasses for men and women.
- Soft rubber on both legs.
- Comfortable light weight fit.
- Wraparound lens, Semi Rimless Eye Protection.
- Temples ratchet allowing adjustments arm height to fit glasses on the face.
- Adjustable arm length.
- Meets ANSI Z87.1-2003 high velocity requirements along with being CE certified and complies with EN-166 requirements
- Available in Clear, Smoke and Amber lens which is great for outdoors as it provides high sun glare protection.



CODE	Lens	Weight kg	Std Pack
AG-C358	Clear	32	1
AG-C358GR	Smoke	32	1
AG-C358Y	Amber	32	1

FATTOOLS®

Safety Glasses Neck Cord

- Adjustable Neck Cord fit all types of glasses.
- To keep your glasses securely fitted to your face this adjustable neck cord is for you



CODE	Weight gr	Std Pack
18014-50	10	1

FATOOLS®

Welder's Goggles

- Welder's goggles with a hinged front-lift door.



CODE	Weight gr	Std Pack
18014-02	70	1

FATOOLS®

Chemical Goggles

- Provides excellent ventilation and indirect protection.
- Fits over most prescription eyewear.
- Clear optical-grade polycarbonate lens.
- Adjustable headband.
- Meets ANSI specifications.



CODE	Weight gr	Std Pack
18013-15	70	1

FATOOLS®

Chemical Respirator

- Single cartridge and twin exhalation valves.
- Economical and easy to use this half-mask, air-purifying respirator is maintenance free and protects against a variety of respiratory hazards.
- Special design for face-piece and soft durable pliable rubber material is soft and light, it's very suitable for wearing
- PP headband, very easy to wear and release
- Activated carbon filter only be need routinely replaced (sold separately).
- Gas that can be protected: Organic steam, ether, benzene, gas, acetone, carbon disulfide
- Applications: chemical industry, fire-fighting, spray painting, emergency, welding/cutting industry



CODE	Weight gr	Std Pack
AG-NP305	600	1

FATOOLS®

Chemical Respirator

- Double cartridge and twin exhalation valves.
- Economical and easy to use this half-mask, air-purifying respirator is maintenance free and protects against a variety of respiratory hazards.
- Special design for face-piece and soft durable pliable rubber material is soft and light, it's very suitable for wearing
- PP headband, very easy to wear and release
- Activated carbon filter only be need routinely replaced (sold separately).
- Gas that can be protected: Organic steam, ether, benzene, gas, acetone, carbon disulfide
- Applications: chemical industry, fire-fighting, spray painting, emergency, welding/cutting industry



CODE	Weight gr	Std Pack
AG-NP306	700	1

FATOOLS®

Chemical Respirator Cartridges



- RC202 Chemical Cartridge For organic vapours, mists and fumes of low toxicity.
- RC203 Chemical Cartridge For spray painting and organic vapours of low toxicity.
- Use with NP305 and NP306



CODE	Weight gr	Std Pack
AG-RC202	100	1
AG-RC203	100	1

FATOOLS®

Flat Fold Disposable Particulate Respirator

- PPF1 rating for protection against mechanically generated particles.
- Designed for easy storage before use.
- Individually packed to avoid contamination.
- Dual straps give firm and comfortable fit.
- Latex free head straps to protect against skin allergies.



CODE	Weight gr	Std Pack
DTC3X	50	20

FATTOOLS®

Disposable Particulate Respirator

- Soft Polypropylene (P.P.) inner layer reduces the fiber drops and increases the wearing comfort.
- High efficient melt blown web filter layer - resist dust and oil-free particle.
- Adjustable nose clip makes the mask closer to the face so that powder cannot leak in between.
- Elastic cords sewn by means of supersonic welding can protect those who wear the mask more effectively.
- With exhalation valve.
- With active carbon, odor-removing filter material removes many nuisance odors for greater comfort and productivity.
- Complies with EN149 standard.



CODE	Weight gr	Std Pack
AG-DAC4F	50	20

FATOOLS®

Reusable Corded Ear Plugs

- Reusable Corded Ear Plugs
- Distinctive triple flanged design.
- Very effective hearing protection.
- Convenient packaging for and on-site distribution Each pair of plugs is individually wrapped.
- Bright Orange.
- NRR 25dB



CODE	Weight gr	Std Pack
AG-EP25	20	1 pairs

FATOOLS®

Reusable Corded Ear Plugs

- Reusable Corded Ear Plugs
- Patented triple curve flanged design.
- Very effective hearing protection.
- Convenient packaging for and on-site distribution
Each pair of plugs is individually plastic carrying case.
- NRR 25dB



CODE	Weight gr	Std Pack
18002-12	50	1 pairs

FATOOLS®

Clip-Attachment Ear Muff

- Clip-attachment Ear Muff for use with hard hats.
- Lightweight and durable ear muff comply to EN352-3.
- High impact ABS cups filled with synthetic foam.
- Adjustable height for improved comfort.
- SNR 27dB.
- Hard hats not included




CODE	Weight gr	Std Pack
18001-10	257	1

FATOOLS®

Clip-Attachment Ear Muff

- Multiple-position headband allows for a variety of wearing styles with the headband positioned over the head, behind the head, or under the chin.
- They can also be worn with other personal protection equipment, including hard hats, visors, face shields, respirators, and welding shields.
- Inner-ventilated headband reduces pressure on head; breathes easier in warm/humid climates
- Snap-in ear cushions make replacement quick and easy
- Non-deforming, dielectric construction suitable for electrical environments.
- SNR 27dB.

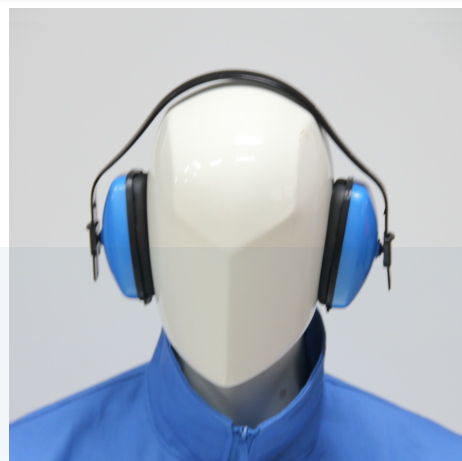

CODE	Weight gr	Std Pack
AG-EM-V1	257	1

FATOOLS®

Body Harness

- Work positioning and fall arrest multi-purpose harness.
- Excellent balance between comfort when hanging and freedom of movement.
- Sternal and dorsal attachment points can be used to connect a fall-arrest system and help ensure that the user is suspended in the correct position after a fall.
- One ventral and two lateral attachment points for multiple hands-free work positioning configurations.
- Leg loops equipped with Double Back buckles.
- All connection points are now aluminum alloy buckles and the carabiner is now a triple locking carabiner.



AMGARD SAFETY™
YOUR SAFETY IS OUR PRIORITY



CODE	Weight kg	Std Pack
AG-SB400	2	1

FATOOLS®

Body Harness

- Attachment Elements – 1 Dorsal and 1 Sternal D-Ring for Fall Arrest. 1 Ventral D - Ring at waist level for Rope Access work and 2 Lateral D- Rings for Work Positioning.
- Adaptability – Adjustable shoulder, thigh- straps and waist belt.
- Convenience – An ideal combination of Fall Arrest, Work Positioning, Rescue and Rope Access applications.
- Ergonomics – Soft padding on shoulder, waist and leg straps for an extended comfort.
- Compliance – Conforms to EN 361:2002, EN 358:2000 & EN 813.



CODE	Weight kg	Std Pack
18RH-PN56	2	1

FATTOOLS®

Full Body Harness

- Light harness to be used where attachment from the back only is required
- Dorsal anchorage point
- Economy style
- EN Compliance : EN 361



CODE	Weight gr	Std Pack
AG-SAFE1	700	1

FATOOLS®

Working Positioning Belt

- Work Positioning Belts have a sliding belt on the comfort pad to provide sufficient lumbar support, which enables the user to easily position the adjustment buckle of the belt at the center of his waist for smooth functioning.
- Designed to support the user in a hands-free work position at height. This belt can be used on its own when there is no risk of a fall, or in conjunction with a harness for fall arrest protection.
- Belt with 2 Lateral D-Rings for Work Positioning.
- Tool holding webbing loops.
- Rings for tool holders, bolt bags, etc.
- Conforms to EN 358:2000 standards.



CODE	Weight kg	Std Pack
AG-SB200	0.7	1

FATOOLS®

Rope Lanyard

- Sewed Restraint Lanyard 1.8m
- Both end with automatic locking upon closure carabiners with 18 mm opening
- Conforms to EN 362



CODE	Weight kg	Std Pack
18SW-312DA	0.5	1

Rope Lanyard

- Sewed Restraint Lanyard 1.8m
- One end with automatic locking upon closure carabiner with 18mm opening another end with aluminium snaplock scaffold hooks with 62 mm opening
- Conforms to EN 362



CODE	Weight kg	Std Pack
18SW-312BA	0.6	1

Rope Lanyard

- Sewed Restraint Lanyard 1.8m
- One end with Carabiner Screw Lock Connector
- Another end with automatic locking upon closure Carabiner with 18 mm opening
- Conforms to EN 362



CODE	Weight kg	Std Pack
18SW-312	0.5	1

Rope Lanyard

- Sewed Restraint Lanyard 1.8m
- One end with Carabiner Screw Lock Connector
- Another end with aluminium snaplock scaffold hook with 62 mm opening
- Conforms to EN 362



CODE	Weight kg	Std Pack
18SW-312B	0.7	1

Body Harness

- Automatic Locking for Vertical use - the rope glides freely along the rope without manual intervention.
- Suitable for 10/12mm or 14/16mm rope.
- 28 cm extension rope with self locking carabiner
- Body in bichromate steel
- Automatic locking upon closure
- Carabiner, 18 mm opening
- System breaking strength: > 15 kN
- Conforms to EN353-2



CODE	Weight kg	Std Pack
AG-18SW-312S	1.05	1

FATOOLS®

Energy Absorbing Rope Lanyard

- Standard Energy Absorbing Rope Lanyard.
- Single leg lanyard suitable for arresting potential falls.
- 11mm kernmantle rope, with a polyester tear-web energy absorber covered in a PVC shrink sleeve.
- Aluminum screw-lock carabiner on the energy absorber and a large aluminum scaffold snap-hook with 62mm opening at the other end
- 1.5m length
- Standards EN355:2002



CODE	Weight kg	Std Pack
18SW-312SHK	1	1

Large Snap-hook Energy Absorbing Lanyard

- Large Snap-hook Energy Absorbing Lanyard.
- Single leg lanyard suitable for arresting potential falls.
- 32mm polyester webbing with a polyester tear-web energy absorber covered in a PVC shrink sleeve.
- Steel screw-lock carabiner on the energy absorber and a large aluminum scaffold snap-hook with 62 mm opening at the other end.
- Length 1.5m
- Standards EN355:1993



CODE	Weight kg	Std Pack
18SW-312WHK	1.1	1

Large Snaphook Twin Legs Energy Absorbing Lanyard

- Large Snaphook Twin Legs Energy Absorbing Lanyard.
- Two legs lanyard suitable for arresting potential falls.
- 32mm polyester webbing with a polyester tear-web energy absorber covered in a PVC shrink sleeve.
- Steel screwlock carabiner on the energy absorber and a large aluminium scaffold snaphooks with 62 mm opening at the each leg.
- Length 1.5m
- Standards EN355:1993



CODE	Weight kg	Std Pack
18SW-312DHK	1.5	1

FATTOOLS®

Latex Gloves

- Made from 100% latex rubber.
- Protects against acids and caustic substances.
- Puncture, tear and abrasion resistant.
- 20 mil. thick and powder free.



CODE	Size		Std Pack
AG-LGM	M	7.5~8.0	1
AG-LGL	L	8.5~9.0	1
AG-LGXL	XL	9.5~10	1

FATOOLS®

PVC Gloves

- These PVC gloves are coated over a two piece cotton interlock liner.
- PVC has good resistance to aqueous solutions, detergents, oils, acids and bases.
- PVC also has good abrasion resistance.
- Available in red color
- Applications
 - Chemical handling
 - Construction
 - Handling oils, acids and caustics
 - Petrochemical
 - General Maintenance
 - Agriculture



CODE	Size	Std Pack
18012-94	14"	1
18012-95	16"	1

FATOOLS®

Polkadot Gloves

- Cotton Polka Dot Gloves - Work gloves for industry and personal safety.
- Lightweight, comfortable seamless work gloves with PVC dotted palm for enhanced grip,



CODE	Weight gr	Std Pack
18012-59	70	12 pairs

FATOOLS®

Leather Welder's Gloves

- AMGARD welders gloves are made from heavy duty split leather which is extremely durable, flame resistant and offers excellent protection from welding spatter and spark.
- Leather is a extremely strong wearing and protects your workwear not only from the hazards of welding but also abrasion, fluids and general wear and tear.



CODE	Length	Std Pack
AG-WG05	13"	1

FATOOLS®

Leather Welding Cap

- AMGARD welders cap are made from heavy duty split leather which is extremely durable, flame resistant and offers excellent protection from welding spatter and spark.



CODE	Weight gr	Std Pack
AG-WC100	200	1

FATOOLS®

Leather Welder's Jacket

- AMGARD welders jackets are made from heavy duty split leather which is extremely durable, flame resistant and offers excellent protection from welding spatter and spark.
- Leather is a extremely strong wearing and protects your workwear not only from the hazards of welding but also abrasion, fluids and general wear and tear.



CODE	Weight gr	Std Pack
AG-WJ100	1300	1

FATOOLS®

Leather Welder's Sleeves

- Amgard welders sleeves are made from heavy duty split leather which is extremely durable, flame resistant and offers excellent protection from welding spatter and spark.



CODE	Weight gr	Std Pack
AG-AP100-S	500	1

FATOOLS®

Leather Welder's Spats

- Amgard welders spats are made from heavy duty split leather which is extremely durable, flame resistant and offers excellent protection from welding spatter and spark.



CODE	Weight gr	Std Pack
AG-WS100	200	1

FATOOLS®

Welding Screen

- Eliminate dangerous Ultra Violet Radiation
- Minimize the glare of high amperage welding arcs
- Increase welding booth illumination without significantly reducing visibility through the screen.
- Manufactured from vinyl film, processed with a color dye, a flame retardant and ultra violet absorber. The dye consumes and filters the blue light brightness associated with the electric arc welding process. The material surface acts as a reflector, causing the arc to appear larger and less bright, thus reducing glare to the eyes. The light is also scattered in different directions, creating a fluorescent light. This causes the pupil to constrict and shut out excess glare, thus reducing light to the retina.
- Surrounding your welding situations with safety.
- Protecting your co-workers and other people from the painful effects of accidental welding flash.
- Safely and quickly defining hazardous welding areas
- Allowing safe observation for safety check of welding operations
- Easy assemble and strong steel tube frame.
- size 1800x1800 mm



CODE	Weight gr	Std Pack
AG-WSC	1500	1

FATTOOLS®

Welding Blanket

- Designed to encapsulate a metal object that has been subjected to heat treatment either through stress relieving or welding. The blanket retards the cooling rates contributing towards the non hardening and possible subsequent embrittlement in the Heat Effected Zone (HEZ).
- Can be placed over or cover an object that cannot be moved and is positioned in such a way that welding spatter and dross could cause damage. It should be arranged loosely over the object to enhance the run off of welding spatter and dross. A welding blanket can also be used as a curtain or screen where a more robust material is required.
- Manufactured from Vermiculite with Fiberglass fabric which is a non-combustible, flexible, inorganic material that has been treated to withstand high temperatures. It has been developed to provide a blanket fabric that will be unaffected by a surface temperature of 860C continuously.
- Size 1800x1800mm



CODE	Weight gr	Std Pack
AG-WBFG	1150	1

FATOOLS®

Mountain Style Safety Helm

- Mountain/Rock, Tower Climbing Style With No Visor for Best Vertical Vision
- Electric Insulation up to 1000 V a.c. OR 1500 V d.c.
- Innovative Adjustable Rotor System (patented) - Adjusting Helmet Tension
- Head Sizes: 53cm - 63cm Weight 350g Available in YELLOW, WHITE or BLUE
- Conforms to: EN397
EN50365:2002




CODE	Color	Weight kg	Std Pack
AG-VX-1.02.201W	White	0.35	1
AG-VX-1.02.201B	Blue	0.35	1
AG-VX-1.02.201Y	Yellow	0.35	1

FATOOLS®

Figure 8 Baley Device

- Figure of Eight Manual Descender for Rescue and Evacuation.
- Figure eights are a common type of friction brake, used in rescue and evacuation situations, which allow fast but controlled descent on a rope.
- Material is Yellow Adonised Aluminium
- Designed for use with Ropes from 9mm to 14mm diameters
- Breaking Strength: >35kN
- Conforms CE EN 567

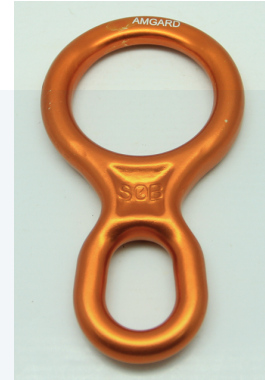

CODE	Weight gr	Std Pack
AG-RD02	100	1

Figure 8 Rescue Baley Device

- Made of anodized aluminum
- Lightweight and good friction while maintaining sufficient safety standards
- Hardcoat finish makes for a smooth, even friction
- Built big enough to handle two rescue ropes
- Extended horns on the upper ring make tying off a snap by preventing the rope from sliding up and locking off
- Dual tie-in holes keep the ring attached to the harness while threading the rope
- Breaking Strength: 40-50kN
- Conforms CE EN 567



CODE	Weight gr	Std Pack
AG-RD08	450	1

Double Prusik Coaxial Pulley

- High strength, high efficiency double Prusik pulley
- Special side plates designed for use with a Prusik friction hitch in progress capture systems
- Parallel mounted sheaves and auxiliary attachment point for creating different types of hauling systems, including the most complex
- Large diameter sheaves mounted on sealed ball bearings for excellent efficiency
- Accepts up to three carabiners to facilitate use
- Min. rope diameter: 7 mm
- Max. rope diameter: 13 mm
- Sheave type: sealed ball bearings
- Sheave diameter: 51 mm
- Efficiency: 97 %
- Breaking Strength: >36kN
- Working load: $2 \times 3 \text{ kN} \times 2 = 12 \text{ kN}$
- Conforms CE EN 12278



CODE	Weight gr	Std Pack
AG-RP60A	260	1

FATOOLS®

Single Prusik Pulley

- High strength, high efficiency Prusik pulley.
- Special side plates designed for use with a Prusik friction hitch in progress capture systems.
- Large diameter sheave mounted on sealed ball bearings for excellent efficiency.
- Accepts up to three carabiners to facilitate use.
- Min. rope diameter: 7 mm
- Max. rope diameter: 13 mm
- Sheave type: sealed ball bearings
- Sheave diameter: 51 mm
- Efficiency: 97 %
- Breaking Strength: >36kN
- Working load: 4 kN x 2 = 8 kN.
- Conforms CE EN 12278.



CODE	Weight gr	Std Pack
AG-RP65	430	1

FATOOLS®

Safety Belt

- AMGARD Safety Belt can be used as positioning devices, not for fall arrest. It should be worn with care to ensure adequate tension.
- No alternations or modifications shall be carried out on the safety belt.
- The lanyard of the safety belt shall not be secured to an anchorage point that is below the level of the wearer waist and no looping of the lanyard around any structural member
- Body belt 50mm x 1,150mm
- Lanyard 10mm diameter nylon rope with 1.5m length



CODE	Weight gr	Std Pack
AG-SB100	1200	1

FATOOLS®

Handled Ascender

- Handled rope clamp: right- and left-handed versions.
- Designed for ascending and occasionally for hauling (progress capture)
- Wide, ergonomic molded handle allows a comfortable yet powerful grip
- Toothed cam with self-cleaning slot optimizes performance under any conditions (e.g. frozen or dirty ropes)
- Lower holes for connecting a lanyard and installing a foot loop with a quick link
- Upper connection hole for creating a pulley/rope clamp combination or for guiding the rope
- Comes in left-handed and right-handed versions, and in black versions
- Rope diameter: 8-13 mm
- Conforms CE EN 567, CE EN 12841 type B



CODE	Version	Weight gr	Std Pack
AG-RB17L	Left	120	1
AG-RB17R	Right	120	1

FATOOLS®

Descender

- Manual Rope Descender with Double Safety Blocking System.
- Designed to be used with ropes with a diameter of 9mm to 12.5mm.
- It is possible for the worker to control the speed of their descent by applying pressure to the handle.
- The descender is fitted with a double safety blocking system.
- Breaking Strength: >20kN
- Conforms CE EN 567



CODE	Weight gr	Std Pack
AG-RD09	340	1

FATOOLS®

Chest Ascender

- Compact, lightweight chest rope clamp.
- Used with the HANDLED ASCENDER for ascending a rope.
- Toothed cam with self-cleaning slot optimizes performance under any conditions (e.g. rope that is icy, muddy, etc.). The stainless steel cam has better resistance to corrosion.
- The rope channel is reinforced with stainless steel for greater durability.
- Catch is opened by pinching for easy, simple manipulation.
- Lower hole is angled to keep the device flat.
- Upper hole for attaching a shoulder strap to keep the rope clamp in position.
- Rope diameter: 8-11 mm
- Conforms CE EN 567



CODE	Weight gr	Std Pack
AG-RB16AAA	120	1

FATOOLS®

Rescue Carabiner

- Large shape and gate opening can fit multiple slings and ropes
- Keylock system, Available with manual locking system (screw-lock) or auto-locking systems (Snap-lock)
- Long Axis Breaking Strength: >40kN
- Short Axis Breaking Strength: >11kN
- Opening Door Breaking Strength:>10kN
- Conforms CE EN 352.



CODE	Weight gr	Std Pack
AG-RM40BL	148	1

Pear-Shape Carabiner


- Pear shape facilitates use with the Munter hitch for single or double ropes
- Large shape and gate opening can fit multiple slings and ropes
- Keylock system, Available with manual locking system (screwlock) or auto-locking systems (Ball-lock).
- Long Axis Breaking Strength: >25kN
- Short Axis Breaking Strength: >7kN
- Opening Door Breaking Strength:>7kN
- Conforms CE EN 352.



CODE	Weight gr	Std Pack
AG-RM26TL	97	1
AG-RM26SL	97	1

Motor Sirens

- Emits ear-piercing sound to deter intruders or alert personnel.
- Motor Siren with the external diameter of 100mm which makes the output of 40W sound volume.
- Body standard color : RED
- Material : STEEL & ABS
- Insulation resistance : 100MΩ(at 500 VDC)
- Dielectric strength : 500VAC, 50/60Hz in 1 minute
- Protection class : IP44
- High-quality motor, rotating speed of 10000 rev / sec.
- Sustainable working hours to 40 minutes duration.
- Output level: 180 dB
- 220V 800W

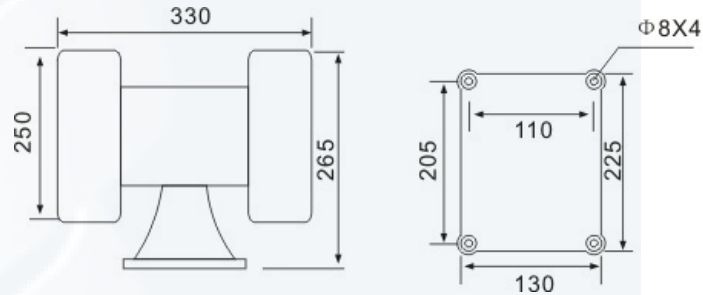


CODE	Weight kg	Std Pack
AG-JS220V	22	1

FATTOOLS®

Buggy Whip Flags

- Buggy Whips Triangle and Square Flags with Reflective Cross or Along Edges.
- Orange Color, 100% polyester fabric, high visible reflective tape meets the requirements of EN471

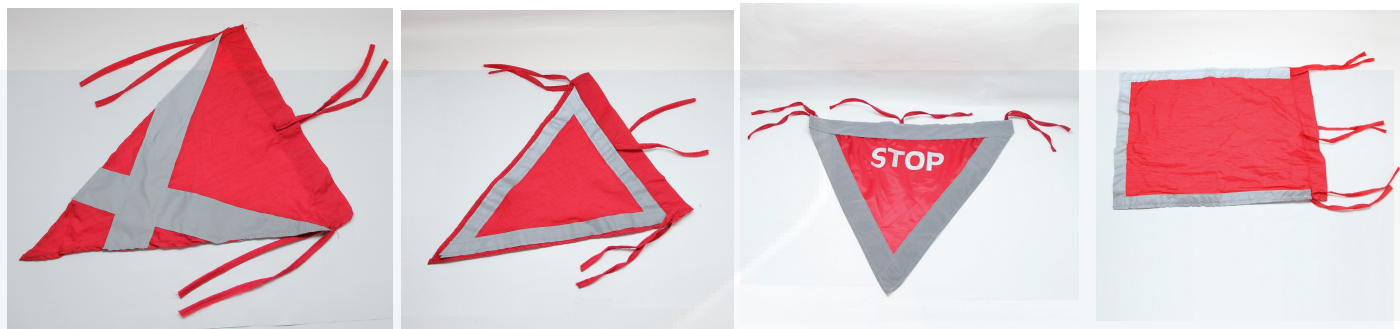

CODE	Shape	Type	Weight gr	Std Pack
18022-51SG3	Triangle	Edges, Plain	30	1
18022-64X3	Triangle	Cross	30	1
18022-64S4	Square	Edges	30	1
18022-55	Triangle	Bahan Peledak	30	1
18022-57	Triangle	STOP	30	1

FATTOOLS®

Strobe Beacon Lamp

- Compact, low profile strobes beacon lamps are designed specifically for forklift and other material handling/industrial applications.
- Features a rugged reinforced nylon base and polycarbonate lens offering a cost effective.
- High quality product that will operate consistently in a full range of 12-24V applications. Replaceable U flashtube.
- Single strobe, magnetic base, with cigarette plug.
- 130mm base diameter, 100mm height.



CODE	Lens Color	Std Pack
AG-LTD6410A	Amber	1
AG-LTD6410B	Blue	1
AG-LTD6410R	Red	1

FATOOLS®

Strobe Beacon Lamp Bulb

- Replacement bulbs for strobe beacon lamps



CODE	Lens Color	Std Pack
18LTB3111	Curl	1
18LTB3111U	U	1
18EC-R6501FT	Socket	1

FATTOOLS®